




- » Capacity range 307-2350 kN
- » Capacity range metric 30-236 tons
- » Pressure range 1250 - 1350 bar
- » Suitable for M24 – M64 bolt sizes
- » Maximum stroke 7 mm – 10 mm
- » Spring return and multistage systems
- » Design suitable for turbine assembly
- » Protection for the over stroke
- » Customized desing available
- » Origin China Producer Torc-Tech

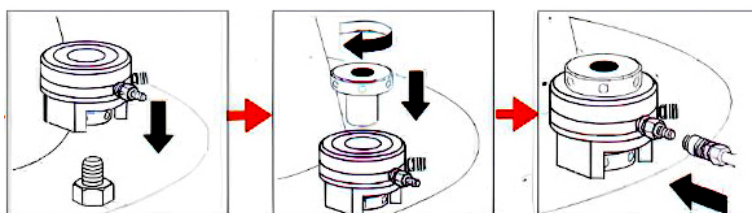

Model	HTE24	HTE30	HTE33	HTE36	HTE39	HTE42	HTE45	HTE48	HTE56	HTE64
Max.Pressure	1350 bar	1350 bar	1350 bar	1350 bar	1350 bar	1350 bar	1350 bar	1350 bar	1350 bar	1250 bar
Max.Capacity	307 kN	465 kN	595 kN	678 kN	800 kN	915 kN	1086 kN	1202 kN	1660 kN	2350 kN
Max. Stroke	7 mm	7 mm	7 mm	10 mm	10 mm	10 mm	10 mm	10 mm	10 mm	10 mm
Effective Area	2274 mm ²	3448 mm ²	4407 mm ²	5027 mm ²	5926 mm ²	6830 mm ²	8047 mm ²	9621 mm ²	12296 mm ²	18800 mm ²
Cylinder Step	2	2	2	2	2	2	2	2	2	2
O.Diameter	59 mm	72 mm	79 mm	84.5 mm	91.5 mm	98.5 mm	107 mm	116 mm	131 mm	147.8 mm
Bolt Size	M24x3	M30x3.5	M33x3.5	M36x4	M39x4	M42x4.5	M45x4.5	M48x5	M56x5.5	M64x6
Hex Seize	36 mm	46 mm	50 mm	55 mm	60 mm	65 mm	70 mm	75 mm	85 mm	95 mm
Weight	5 kg	6.6 kg	8 kg	10.7 kg	12.8 kg	16.1 kg	20.8 kg	22 kg	24 kg	47.2 kg

Accessories



HLP3-20N



HLP3-20

1500 Bar
Hose1500 Bar
Couplings