




TORC | TECH Square Drive Hydraulic Torque Wrenches

A Brand of Surkon International

112 -72.000 Nm

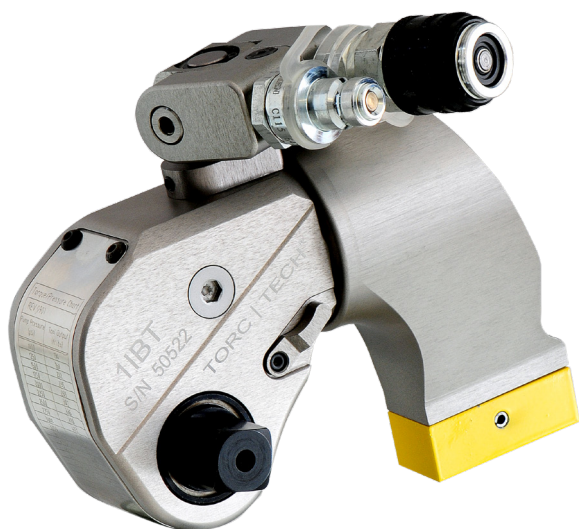

- » Tightening torque accuracy $\pm 3\%$
- » 10 different models using impact sockets.
- » Capacity range from 112 to 7.000 N·m.
- » Durability and reliability through single body construction.
- » Titanium-aluminum alloy, lightweight and strong.
- » Suitable for continuous heavy duty operation
- » Rotatable multi-position reaction arm with locking feature.
- » Easily replaceable fine-thread square or Allen drive.
- » $360^\circ \times 180^\circ$ rotatable multi-position oil inlet port.
- » Screw fastening coupling with locking mechanism.
- » Laser-engraved pressure torque table on the body.
- » Comprehensive accessories and drive options.

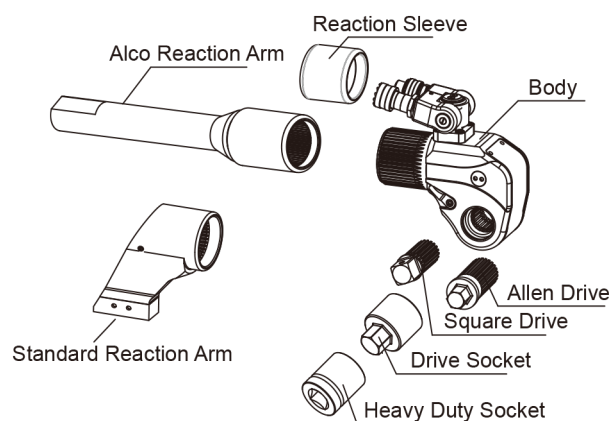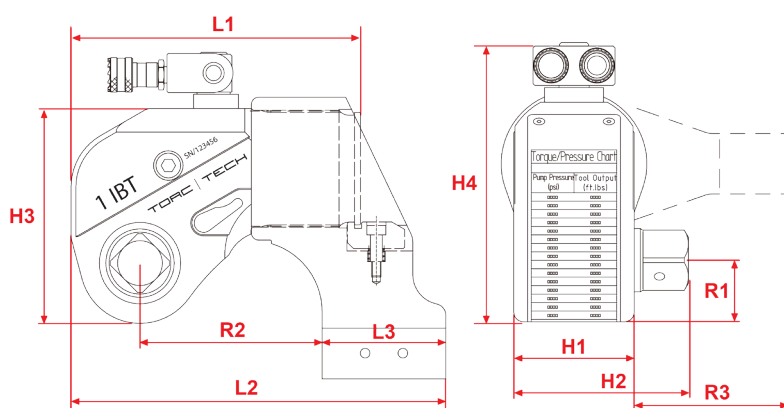

Model	Torque Range	Bolt Size	Drive	Weight	Sizes (mm)										
#	N.m	M	inch	kg	L1	L2	L3	H1	H2	H3	H4	R	R1	R2	R3
07IBT	110-1.100	14 - 30	3/4"	1.8	111	140	46	42	66	77	109	75	21	69	54
1IBT	180 - 1.850	16 - 36	3/4"	2.5	145	173	59	50	72	96	131	92	26	85	66.5
3IBT	430 - 4.500	22 - 48	1"	5	178	229	75	68	95	127	177	124	34	114	89.5
5IBT	740 - 7.500	27 - 56	1.1/2"	8	211	271	87	80	123	149	199	140	39	137	100
8IBT	1.000 - 10.700	30 - 64	1.1/2"	11	222	293	93	90	134	167	217	165	47	153	120
10IBT	1.550 - 15.500	36 - 72	1.1/2"	15	246	318	105	100	142	182	232	178	51	154	128
20IBT	2.600 - 26.600	42 - 90	2.1/2"	26.5	308	384	126.5	120	183	220	270	213	59	186	153
25IBT	3.400 - 34.700	48 - 100	2.1/2"	35	323	401	129.5	137	200	247	297	228	66	199	159.5
35IBT	4.800 - 48.700	64 - 120	2.1/2"	50	373	497	193	135	216	282	332	244	77	214	167
50IBT	7.200 - 72.00	72 - 125	2.1/2"	87	400	516	159.5	160	223	291	341	258	81	259	178

Accessories



Hoses



Couplings



Impact Sockets



Torque Wrench Pump